

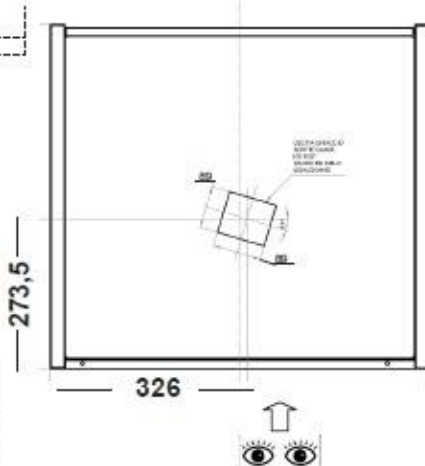


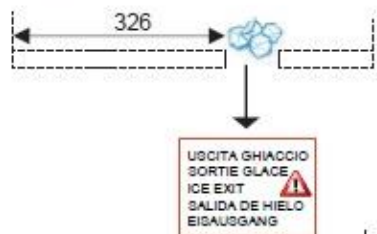

# ASGP 200




FABBRICATORI DI GHIACCIO GRANULARE PRESSATO  
 MACHINES À GLACE EN GRAINS PRESSÉE  
 ICE FLAKE MACHINES – PRESSED ICE FLAKES  
 FABRICADORES DE HIELO GRANULAR PRENSADO  
 EISFLOCKENBEREITER GEPRESSTE EISFLOCKEN

200

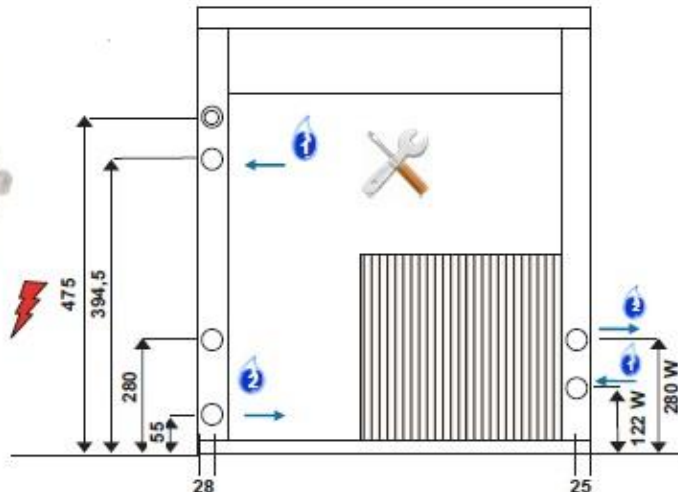


Stainless steel AISI 304

L=1800 mm		
ø 3/4"		
ø 3/4"		
130÷140 mm		

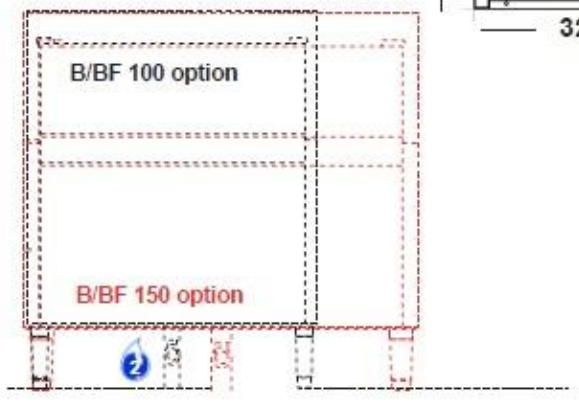


Kg / 24h - Air				
	38°	102	32°	
	32°	132	21°	
	21°	162	15°	
	10°	175	10°	

Kg / 24h - Water				
	38°	135	32°	
	32°	155	21°	
	21°	170	15°	
	10°	180	10°	

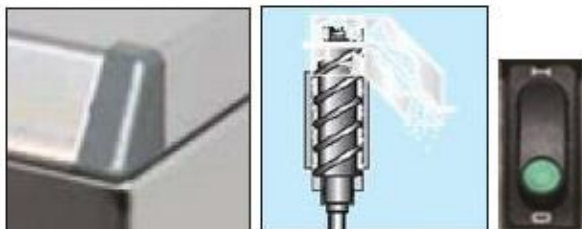



Stainless steel AISI 304



Air



Water

# ASGP 200

FABBRICATORI DI GHIACCIO GRANULARE PRESSATO  
 MACHINES À GLACE EN GRAINS PRESSÉE  
 ICE FLAKE MACHINES – PRESSED ICE FLAKES  
 FABRICADORES DE HIELO GRANULAR PRENSADO  
 EISFLOCKENBEREITER GEPRESSTE EISFLOCKEN

## Dati tecnici – Caractéristiques techniques – Technical specifications – Datos técnicos – Technische Daten

Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		175-385
Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		180-396
Contenitore/Bac/Bin/ /Depósito/Behälter <b>OPTION B/BF 100</b>	Kg/Lb	100-220
Contenitore/Bac/Bin/ /Depósito/Behälter <b>OPTION B/BF 150</b>	Kg/Lb	150-330
Larghezza/Largeur/Width/Anchura/Breite	mm	560
Profondità/Profondeur/Depth/Profundidad/Tiefe	mm	640
Altezza/Hauteur/Height/Altura/Höhe	mm	622
Peso netto/Poids net/Net weight/Peso neto/Nettogewicht	Kg	58
Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht	Kg	63
Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen	m <sup>3</sup>	0,30
Alimentazione/Voltage/Voltaje/Anschlussspannung	V/Hz/ph	230/50/1
Compressore/Compresseur/Compressor/Compresor/Kompressor	HP	1/2
Compressore/Compresseur/Compressor/Compresor/Kompressor (T evap.= -10°C)	W	676
Watt - Totale/Total/Total/Total/Gesamt (T = +43°C)	W	720
Calorie/Calorie/Calorie/Caloria/Kalorie cond.	Kcal/h	1040
Ampère - Totale/Total/Total/Total/Gesamt	A	4
Fusibile/Fusible/Recommanded fuse/Fusible/Netzsicung	A	10
Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel	R	290
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,095
eq. CO <sub>2</sub>	Kg	0,285
GWP		3
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,065
eq. CO <sub>2</sub>	Kg	0,195
GWP		3
Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß	Ø	3/4"
Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß	Ø	3/4"
Acqua/Eau/Water/Agua/Wasser - lt / h		7-25
Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar	min/max	1-6
Temp.ambiente/Temp.ambiant/Ambient temp./Temp.ambiente/Rammtemperatur - °C	min/max	10-40
Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C	min/max	5-35